

Veneered panel






thickness mm	n° layers
4	3
8 10	5
12	7



thickness mm	n° layers
4 5	3
6 8 10	5
12	7

LENGTH
WIDTH

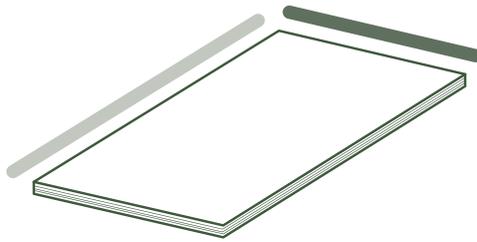

Tolerances for length, width, thickness, squareness and edge straightness are specified in UNI EN 315

MOISTURE CONTENT

The moisture content of poplar plywood is determined based on the specifications in UNI EN 322, is usually between 8% and 12%

CUSTOMIZATION
Other dimensions and specific thickness tolerances upon request

AFRICAN WOOD ESSENCES



EUROPEAN WOOD ESSENCES



QUALITY GRADES

FRONT	CORE	BACK
I AB		III BB
Wood essence	Poplar	Poplar
Wood essence	Poplar on request	Wood essence

BONDING CLASS



EMISSIONS

Class E1 - limits established by the UNI EN 13986 standard

Class E05 - on request